



CHEVRON CONVEYOR BELTS

Other Chevron Designs


Dyna Engineering supplies high quality, Chevron Conveyor Belting. If you cannot find a design, we can manufacture designs to meet your requirements.




C32P460




C32P580




C32P630




C17P300




C17P440




C17P550



C17P630




Y32P600




Y32P800

Chevron conveyor belt specification:

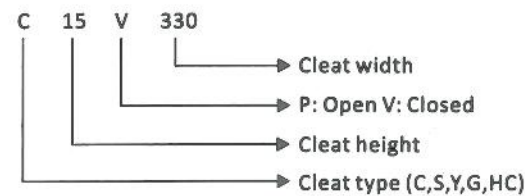


Cleat height	Base belt PN	Head pulley (mm)	Tail pulley (mm)	Snub (mm)
5~6mm	250/2	250	250	160
	400/3	315	250	200
	500/3	400	350	250
10mm ~ 15mm	250/2	300	250	200
	400/3	350	315	250
25mm ~ 32mm	500/3	500	400	350
	250/2	300	250	250
	400/3	400	350	315
	500/3	500	400	350
	630/4	600	500	400



DYNA Engineering

Manufacturers & Suppliers of Conveyor Equipment & Services

Chevron Conveyor Belts




DYNA
Engineering

11 Rio St
Bayswater WA 6053
Phone 08 9473 4300
Fax 08 9473 4399

PO Box 84
Bayswater WA 6933
Freecall 1800 801 558
www.dynaeng.com.au
Email dyna@dynaeng.com.au

11 Rio St Bayswater WA 6053
PO Box 84 Bayswater WA 6933


Telephone 08 9473 4300 Fax 08 9473 4399 Freecall 1800 801 558

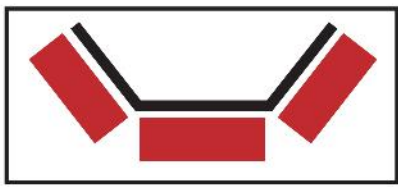

DYNA Engineering


Standard Chevron Designs

Item: Multi V
Profile height: 1/4"
Application: Wood chip & bark, fertilizers, grains and sand.

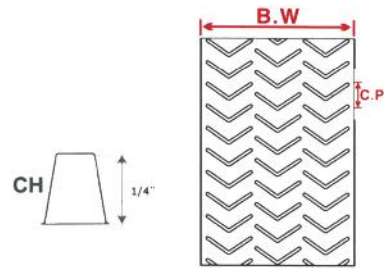


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
1/4"	600~1400	76	600~1400

Item: C5 V
Profile height: 5mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

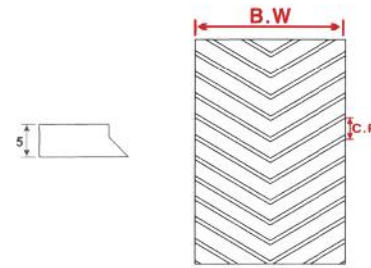


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
5	300~1200	100	300~1200

Item: C10 V
Profile height: 10 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

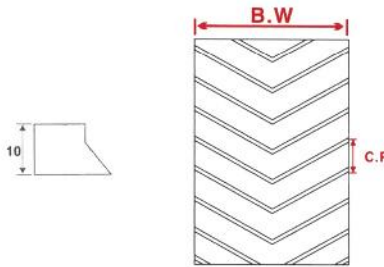


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
10	300~1200	100	300~1200

Item: C15 V
Profile height: 15 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

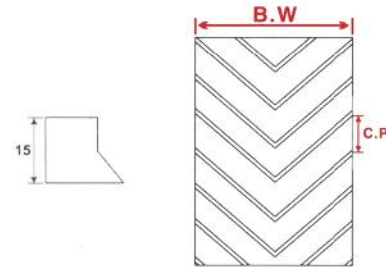


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
15	300~1200	125	300~1200

Item: C15 V330 Closed V
Profile height: 15 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.




C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
15	330	250	400~650

Item: C15 V450 Closed V
Profile height: 15 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.




C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
15	450	300	500~800

Item: C15 P385, Open V
Profile height: 15 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

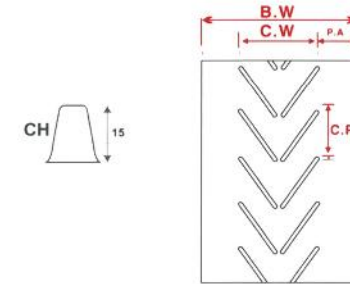


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
15	385	250	500~800

Item: C15 P750, Open V
Profile height: 15 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

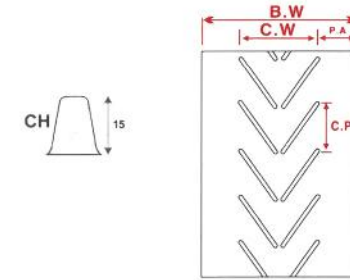


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
15	750	250	800~1200

Item: C25 P550, Closed U
Profile height: 25 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

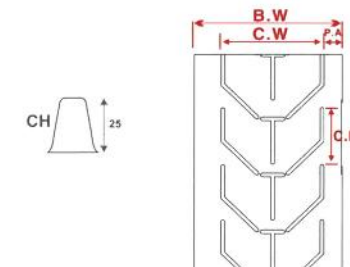


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
25	550	330	600~800

Item: C15 P600, Open V
Profile height: 15 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

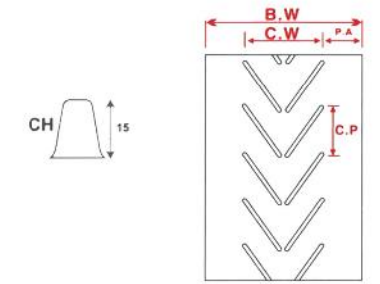


C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
15	600	250	650~1000

Item: C25 P450, Closed U
Profile height: 25 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

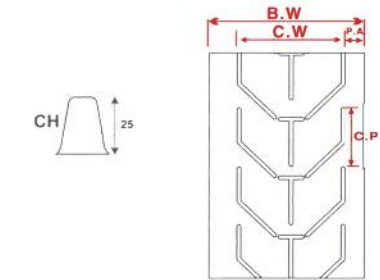

C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
25	450	330	600~800

Item: C25 P750, Open U
Profile height: 25 mm
Application: Wood chip & bark, fertilizers, grains and sand, quarry, coal, package and bag etc.

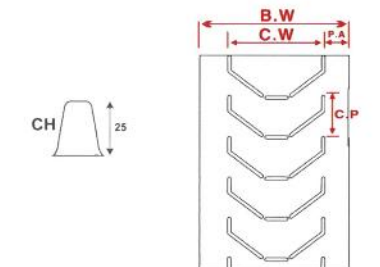

C.H (mm)	C.W (mm)	C.P (mm)	B.W (mm)
25	750	330	1000~1200